

## WIRE SHELVING ACCESSORIES

### Direct Wall Mounts

Each consists of one shelf support and mounting plate. Use single support at shelf ends; double support for adjoining shelves. (Single — Two required per shelf.)



SINGLE



DOUBLE

Shelf Width		Approx. Pkd. Wt.		Model No.		Approx. Pkd. Wt.		Model No.	
(in.)	(mm)	(lbs.)	(kg)	Chrome	Green Epoxy	(lbs.)	(kg)	Chrome	Green Epoxy
14	355	1.5	0.7	J1WD14C	J1WD14K	3	1.4	J2WD14C	J2WD14K
18	457	2	0.9	J1WD18C	J1WD18K	4	1.8	J2WD18C	J2WD18K
24	610	3	1.4	J1WD24C	J1WD24K	4.5	2.0	J2WD24C	J2WD24K

### Stem Casters — Resilient Rubber (Order By Each)

Use with posts to create a mobile shelving unit to meet your special needs. Each caster is constructed of resilient rubber wheels and plated components. Load rating is 200 lbs. (90kg) per caster. Sold by the piece.



Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Approx. Pkd. Wt.		Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)	
5	127	1 1/4	32	200	90	Stem/Swivel	Resilient	2 1/2	1.1	J5
5	127	1 1/4	32	200	90	Stem/Brake	Resilient	2 5/8	1.2	J5B

### Stem Caster Kit — High Modulus Rubber (One Kit = Four Casters)

Kit consists of four swivel casters with brakes. Each caster is constructed of durable, non-marking high modulus rubber. Load rating is 300 lbs. (136kg) per caster.




Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Approx. Pkd. Wt.		Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)	
5	127	1 1/4	32	300	136	Stem/Brake	Flat High Modulus Rubber	9	4.1	J5FBA-4

### Stackable Shelf Ledges

4" (100mm) High.

Shelf Width		Approx. Pkd. Wt.		Model No.
(in.)	(mm)	(lbs.)	(kg)	Chrome
14	355	0.83	0.36	JL14-4C
18	457	1.5	0.68	JL18-4C
24	610	2	0.9	JL24-4C
30	760	2.25	1.03	JL30-4C
36	914	2.75	1.25	JL36-4C
48	1219	3.75	1.68	JL48-4C
60	1524	4	1.81	JL60-4C
72	1828	5	2.25	JL72-4C


NOTE: Actual ledge length is approximately 1" (25mm) shorter than nominal shelf length/width.

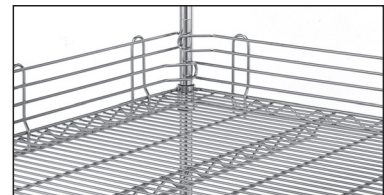

### Shelf Dividers for Shelves

Keep shelf contents orderly with these 8" (203mm) high, pressure-fit dividers.

Shelf Width		Approx. Pkd. Wt.		Model No.
(in.)	(mm)	(lbs.)	(kg)	Chrome
18	457	2.25	1	JDD18C
24	610	2.75	1.3	JDD24C

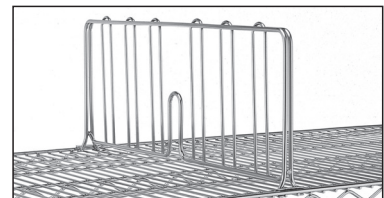

### Replacement Plastic Split Sleeves

One bag required per shelf; 4 pairs per bag. Model No. J9985



### "S" Hook

Two are required for each storage level. Model No. J9995Z



### Foot Plate

Use to bolt units to the floor, or when a broader, more stable foot is desired. Zinc Finish. Model No. J9993Z

